

# HARMSCO®

# HCP

## Premium Hurricane® Polyester Cartridges

Maximum Surface Area

Designed for Hurricane® and WaterBetter® Filter Housings

High Flow Performance

Lower Operation Cost with Hurricane® Cartridges

- High flow capability
- Lower overall operating cost
- Reduced waste disposal
- Longer filter runs for fewer change-outs
- Increased contaminant removal
- Operator friendly



Certified to  
NSF/ANSI Standard 61



Premium Hurricane®  
Polyester Cartridges

### Features

- ▶ Fewer cartridges for fewer change-outs and lower maintenance cost
- ▶ Pleated Polyester-Plus™ filter media provides higher flow rates and lower initial pressure drop
- ▶ Pleated surface area provides higher loading capacity for longer filter life and increased particle removal
- ▶ End cap, center tube and media are thermally bonded as one integral component for added strength
- ▶ Offered in three sizes (40, 90 and 170) and eight micron ratings (0.35, 1, 5, 10, 20, 50, 100 and 150) to meet all your high flow requirements

### Applications

- ▶ Reverse Osmosis Pre-filtration
- ▶ Municipal Drinking Water Filtration
- ▶ Commercial/Residential Drinking Water Filtration
- ▶ Desalination Pre-filtration
- ▶ Industrial Water Filtration
- ▶ Cooling Tower Filtration
- ▶ Chill Water Loop Filtration
- ▶ Food & Beverage Filtration
- ▶ Marine/Aquatic Filtration
- ▶ Industrial Coolant Filtration



HARMSCO® Filtration Products



Made in USA

# Premium Hurricane® Polyester Cartridges

## Specifications

- ▶ **Micron Ratings:** Nominal micron ratings of 0.35, 1, 5, 10, 20, 50, 100, 150
- ▶ **Filter Media:** nominal pleated Polyester-Plus™
- ▶ **End Caps:** Pliable PVC with sealing surface built-in
- ▶ **Center Tubes:** ABS or PVC
- ▶ **Temperature:** 140°F (60°C) temperature limit\*  
\* Temperature limits vary and depend on pressure and time under load.

**Cleanable/Reusable** in most filtration applications and micron ratings.


## Cartridge Selection/Sizing Guide

**7-3/4" O.D.** For Harmsco® Hurricane® and WaterBetter® Single-cartridge Filter Housings



Certified to NSF/ANSI Standard 61

| Cartridge Length   | Product Code | Nominal Micron Rating | Media (sq ft) | Recommended Flow Rate* (GPM) | Max Flow Rate* (GPM) | Max Flow Rate* (LPM) | Max Flow Rate* (M <sup>3</sup> /HR) | No./ Carton | Carton Size |        |
|--|--------------|-----------------------|---------------|------------------------------|----------------------|----------------------|-------------------------------------|-------------|-------------|--------|
| <b>Premium Hurricane® Polyester Cartridges</b> - rated up to 140°F (60°C). |              |                       |               |                              |                      |                      |                                     |             |             |        |
| 9-5/8"   | HC/40-0.35   | 0.35                  | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-1      | 1                     | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-5      | 5                     | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-10     | 10                    | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-20     | 20                    | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-50     | 50                    | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-100    | 100                   | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | HC/40-150    | 150                   | 40            | 35                           | 50                   | 189                  | 12                                  | 1           | 9x9x11      |        |
|  | 19-1/2"      | HC/90-0.35            | 0.35          | 90                           | 70                   | 100                  | 378                                 | 24          | 1           | 9x9x21 |
|  |              | HC/90-1               | 1             | 90                           | 70                   | 100                  | 378                                 | 24          | 1           | 9x9x21 |
| HC/90-5  |              | 5                     | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| HC/90-10   |              | 10                    | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| HC/90-20   |              | 20                    | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| HC/90-50   |              | 50                    | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| HC/90-100  |              | 100                   | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| HC/90-150  |              | 150                   | 90            | 70                           | 100                  | 378                  | 24                                  | 1           | 9x9x21      |        |
| 30-3/4"  |              | HC/170-0.35           | 0.35          | 170                          | 105                  | 150                  | 568                                 | 36          | 1           | 9x9x32 |
|  |              | HC/170-1              | 1             | 170                          | 105                  | 150                  | 568                                 | 36          | 1           | 9x9x32 |
|  | HC/170-5     | 5                     | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |
|  | HC/170-10    | 10                    | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |
|  | HC/170-20    | 20                    | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |
|  | HC/170-50    | 50                    | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |
|  | HC/170-100   | 100                   | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |
|  | HC/170-150   | 150                   | 170           | 105                          | 150                  | 568                  | 36                                  | 1           | 9x9x32      |        |

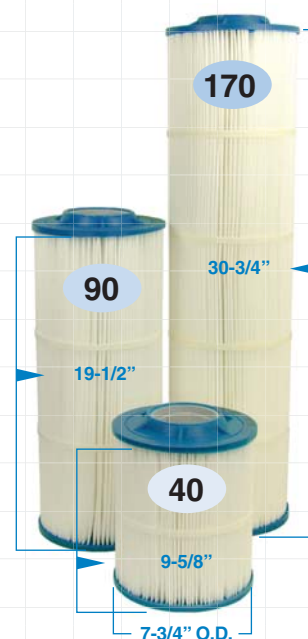


**Premium Hurricane® Polyester Cartridges**

Length and O.D.

\*Harmsco® recommends operation at 70% of maximum flow rate for optimum performance.

## Pressure Drop

Pressure drop shown at right is for filter housing and 20 micron filter cartridge in clean water.

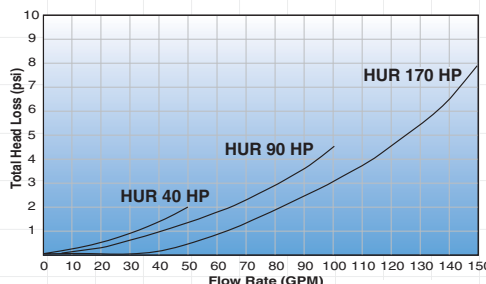

**Note:** This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



**HARMSCO® Filtration Products**

7169 49th Terrace North, Riviera Beach, FL 33407  
(561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

[www.harmsco.com](http://www.harmsco.com)



Made in USA

© Harmsco, Inc.

12/18