

HIGHER DIRT HOLDING CAPACITY!

Compare Harmsco® Pleated Cartridges to the Competition!

Proven Performance


- Higher Dirt Holding Capacity
- Higher Throughput
- Cleanable and Reusable*

Laboratory testing using AC Coarse Test Dust demonstrate the superior performance of Harmsco® pleated filter cartridges.

A summary of the test results are shown below:



Certified to ANSI/NSF 61

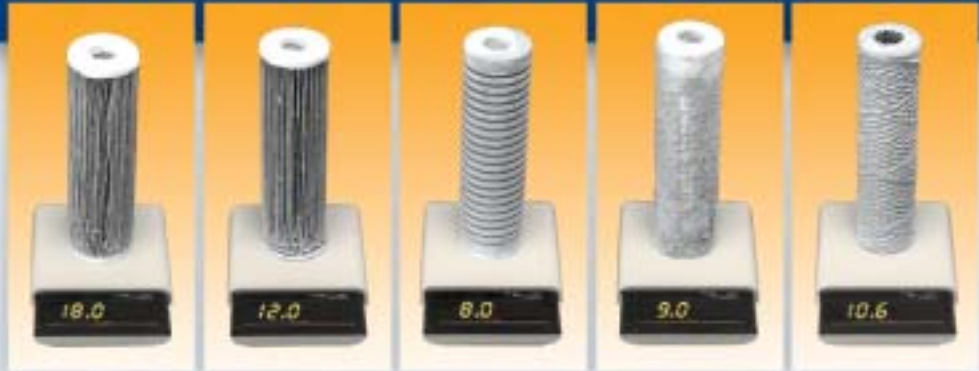

	HARMSCO® "801"	HARMSCO® WaterBetter	Resin Bonded Cellulose	Spun Polypropylene	String Wound
Solids removed (oz.)	12.0	7.0	3.3	2.5	2.1
Minutes to achieve 30 psiΔp	16.8	11.08	2.8	1.97	1.33
Cleanable & Reusable?	Yes	Yes	No	No	No

Tests conducted with coarse test dust and 3% solids using 5 micron cartridges. Filtration was terminated when each cartridge reached a 30 psi pressure differential. Cartridges were weighed dry before and after filtration tests to determine solids removed.

*Harmsco pleated filter cartridge products are cleanable and reusable in most applications (5 micron & Higher)



Harmsco® Filtration Products

P.O. Box 14066, North Palm Beach, FL 33408
 Telephone: (561) 848-9628 • Fax: (561) 845-2474
 email:sales@harmsco.com

